



Lift Tables and Goods Lifts

JIHAB Single scissors and high-lift



JIHAB Single

JIHAB Single is a single scissor lift table. This design is the basic model which forms the foundation of the entire JIHAB lifting table range.

JIHAB Single can be used in a very wide range of applications in production, material handling and distribution, and as a component of a logistics system. JIHAB Single is a cost-effective handling product which can help you to design an ergonomically correct

JIHAB Single can be designed and equipped to meet user specifications and requirements.



JIHAB High-lift

JIHAB High-lift has multiple vertical scissor packages. Using several vertical scissor packages gives higher lifting movement without increasing the length of the lifting table.

This reduces space requirements. JIHAB High-lift can be used in places where large lifting movement is required. Such as in various types of lifts, working platforms and

JIHAB High-lift can be designed and equipped to meet user specifications and requirements.

Performance:


- Lifting capacity up to 2,000Kg
- Lifting movement 800mm
- Lifting table size max 1,400 x 1,200mm

Both models can be designed and equipped to meet user specifications and requirements. JIHAB Single can be designed and equipped to meet user specifications and requirements.

and unloaded directly from the floor with a pallet lifter.

Both types of lifting table are suitable for use in a correctly designed ergonomic workplace. JIHAB Low profile and

JIHAB Low profile U have the same performance:

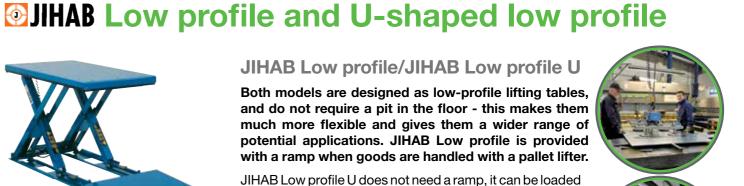





JIHAB Long load and loading dock



JIHAB Long-load

JIHAB Long-load has multiple horizontally arranged scissor packages.

Using several horizontally arranged scissor packages gives a longer table length and lifting capacity. The movement of the scissor packages is coordinated to give parallel lifting movement. JIHAB Long-load is an excellent choice when you need to handle long and heavy goods.

JIHAB Long-load can be designed and equipped to meet user specifications and requirements.



JIHAB Loading dock

JIHAB Loading dock is designed for harsh environments and heavy loads.

It is at its best when used for loading and unloading in a loading bay, often outdoors. This job subjects the lifting table is to heavy loads, often concentrated to one point.

JIHAB Loading dock can be designed and equipped to meet user specifications and requirements.



JIHAB Vehicle carrier and Low cost models



JIHAB Vehicle

JIHAB Vehicle is only intended for transporting cars/vehicles between different floors, such as in sales and exhibition halls and multi-storey car parks.

The lifting table is designed for even loading. It is not intended for passenger carrying. Special user instructions and safety rules apply to installation and operation.

JIHAB Vehicle can be designed and equipped to meet user specifications and requirements.



JIHAB Low-cost

JIHAB Low-cost is available as standard units which can not be specially equipped or designed to suit customer requirements.

They are offered at a very attractive price for traditional lifting table use. JIHAB Low cost is not designed for continual use in production lines etc.

Performance:

- Lifting capacity 500, 1,000 and 2,000Kg
- Lifting movement 800 mm
- Lifting table size max 1,200 x 800 mm or 1,350 x 800mm



OJIHAB Equipment

There is an extensive range of optional equipment, in addition to the standard JIHAB range, which offers extensive customisation of a standard lifting table.

We would be happy to equip your lifting table so that it gives you maximum economy and correct ergonomy.

Only a small selection of our optional equipment is shown in the pictures.







Mezzanine floor goods lifts.

Mezzanine floor lifts are manufactured locally allowing both standard and bespoke designs to be installed within short lead times. Our comprehensive project management helps you from site assessment through the design, manufacture and installation phases of the project, including whole life maintenance.

Standard Safety Features

The following safety features are standard across the MezzLift range:

- CE marked and built in conformance with:
- Machinery Directive 2006/42/EC
- Lifting Operations & Lifting Equipment Regulations 1998
- The Provision & Use of Work Equipment Regulations 1998
- Level gates fitted with electrical & mechanical interlocks
- Hazard warning safety signs
- Comprehensive O&M manual
- Emergency stop button fitted to all control stations
- Anti-slip platform surface
- Hose burst protection
- Overload protection



NEW! MezzLift Heavy Duty

The new, MezzLift Heavy Duty is a robust and versatile mezzanine floor lift for handling loads up to 1000kg between floors in warehouses, factories, retail stores and workshops.

- 1,000kg maximum working load
- Usable platform size1,500mm x 1,500mm
- 2 stop lift, up to 4,000mmtravel height
- 2,000mm high double gatesat both levels
- Platform safety lock at upper level
- Electrically interlocked gates
- Constant pressure control buttonsat both levels
- Floor mounted, no pit required
- Self-supporting mesh shaft
- Same side or through car loading

Options

- Bespoke platform sizes
- Additional entrances
- Trolley stop barriers on platform
- Outside installation
- Choice of finish
- Clad enclosure








Pallet loading



Control buttons

Mezzanine floor goods lifts.

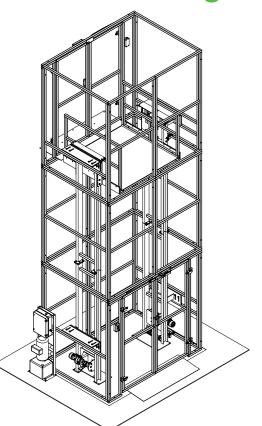

MezzPro

The MezzPro is a goods lift which enables users to move goods such as trolleys or pallets safely and efficiently to a second floor within buildings, for example mezzanine floors.

13 Lift Tables and Goods Lifts


Features

- 500kg maximum working load
- Opposed mast support for minimalplatform deflection
- Lift speed approx. 0.15m/s
- Fixed platform A -1,300mm x 1,300mmor fixed platform B -2,000mm x 1,000mm
- 2 stop lift, up to 4,000mmtravel height
- Ground to mezzanine floor
- 2,000mm high double gatesat both levels
- Electrically interlocked gates
- Constant pressure control buttonsat both levels
- Floor mounted, no pit required
- Self-supporting mesh shaft
- Same side or through car loading

Options

- Bespoke platform sizes
- Increased gate height
- Outside installation
- 90° loading or additional entrances
- Trolley stop barriers on platform
- Clad enclosure
- Choice of finish







MezzLight

The MezzLight is a simple, robust and versatile mezzanine floor lift for handling loads up to 250kg between floors in warehouses, factories, retail stores and workshops.

Features

- 250kg maximum working load
- Lift speed approx. 0.15m/s
- Usable platform size1,300mm x 1,100mm
- Will lift Euro & UK pallets
- 2 stop lift, up to 4,000mmtravel height
- 2,000mm high double gatesat both levels
- Electrically interlocked gates
- Constant pressure control buttonsat both levels
- Floor mounted, no pit required
- Self-supporting mesh shaft
- Same side or through car loading



Self-supporting mesh shaft

Options

- Bespoke platform sizes
- Increased gate height
- Outside installation
- Choice of finish
- 90° loading or additional entrances
- Trolley stop barriers on platform
- Clad enclosure




Pallet loading ramp

13 Lift Tables and Goods Lifts



MezzLight Handloaded

The MezzLight Handloaded is designed to easily load and unload goods such as crates and boxes at waist height.

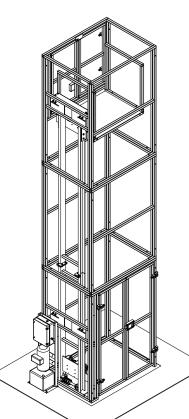

Features

- 250kg maximum working load
- Lift speed approx. 0.15m/s
- Usable platform size 1,000mm x 800mm
- 2 stop lift, up to 4,000mm travel height
- Ground to mezzanineDocks 800mm above floor height
- Slam shut gates
- Hold to run handle at lower level
- Same side or through car loading

Options

- Bespoke platform sizes
- Increased gate height
- Outside installation

- Choice of finish
- 90° loading or additional entrances



Waist level access



Docks 800mm above floor height



Ground to mezzanine



Loading Bay design



Vertical BayLift with platform lowered

BayLift

The BayLift is ideal for lifting loads between different levels where the height difference is less than 1500mm, such as loading bays and docks.

With no need for a lift pit the BayLift offers a practical load handling solution where alternative equipment such as conventional scissor lifts or dock levellers cannot be installed.

Separate versions are available with capacities from 500kg to 1,000kg along with a range of platform sizes that ensure the BayLift can safely handle crates, pallets, roll cages, sack barrows and many other loads.

Features

- 500kg or 1,000kg maximum working load
- Platform size up to 2,400mm x 1,500mm
- Folding barrier on platform
- 2 stop lift, up to 1,500mm travel height
- Constant pressure control
- Floor mounted, no pit required
- Folds away after use

Options

- Bespoke platform sizes
- Trolley stop or anti-roll-off toe on platform
- Outside installation
- · Free standing mounting bracket



Proximity Warning and Safety Systems